

# DZ-3A

## MEC 15-AXIS CNC COILING AND TORSION MACHINE for Ultra-Fine Wire

For wire diameters of  $\phi 0.03 \sim \phi 0.3 \text{ mm}$

**The fusion of high-speed, high-precision coiling,  
and freely formed torsion processing expands into  
new application ranges within the field of ultra-fine wire.**



Click  
here for  
processing  
video



## Features

### Increasing production possibilities by combining high-speed, high-precision coiling and bending processing



- This machine can process coils equivalent to standard coil machines and allows flexible bending with three 3D slides. This gives the operator an endless amount of processing possibilities, which they could have never imagined before.
- The dual feed rollers, introduced for the first time for ultra-fine wire, reduce feed pressure applied to the wire, making stable coiling possible.

### 3D slides with versatile modular design capability

Each 3D slide can be equipped with modular units such as tool changers or rotary servo motors.

### Support for IOT

The operating status of machine can be monitored through mobile phones or computers, and regular maintenance with preventive maintenance functions can contribute to improved production efficiency.

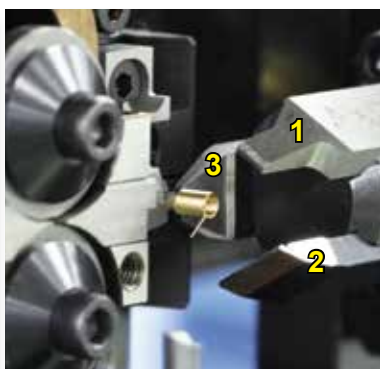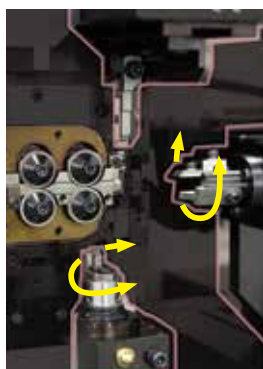

### State of processing

The top, bottom, and right slides can be freely controlled individually or in combination. In addition, the tip of the slide can rotate and can be used for spinner bending or as a tool changer for 3 tools.

### Improved operability with the MNO2 (MEC New Operation 2) programming software


- The MEC original MNO2 software easily organizes important statistics about the machine, including program flow, operating status of each axis, inputs/outputs, jump, etc., as with our other spring machines.
- The servo motor control enables high resolution and precise operation.
- The motor sensor system makes every slide a sensor. It is possible to measure the presence/absence judgment with a touch sensor, coiling angle, free length, etc. in 0.001 mm units. The measurement results are displayed in tables and graphs, and easy correction control for each axis is possible.
- Both torsion and coiling machines have the same programs, whose goal is convenience for the operator.
- Highly efficient production is supported by a versatile production management and data collection functions.



### MNO2 main program and production management screen

Greatly improved operability, with the easy-to-use navigation system and the touch screen, makes it easy to create programs and shortens setup time.

## Specifications

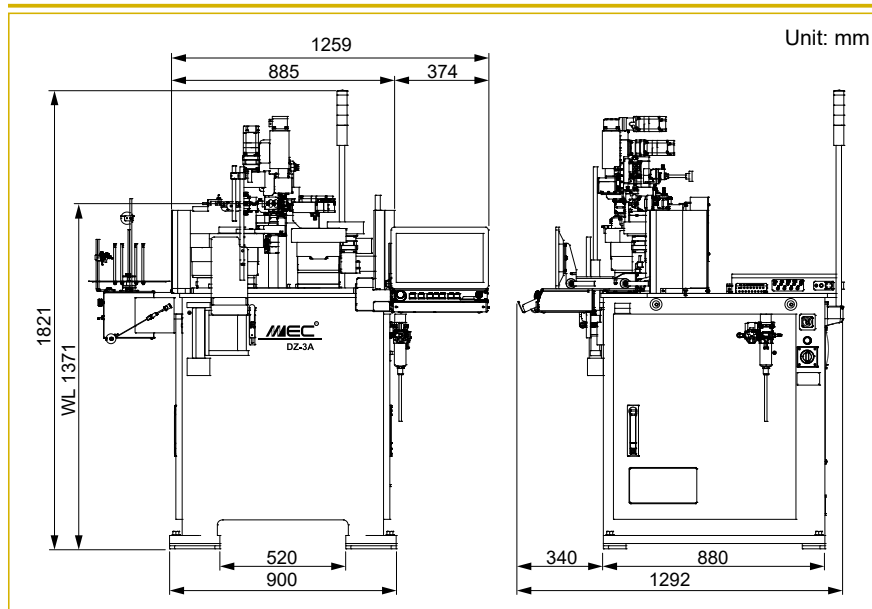

Unit: mm

Machine name	DZ-3A
Wire diameter	ø0.03 ~ ø0.3 mm
Outer coil diameter	ø8 mm
Index	D/d 3.5 or more
Feed axis*	0.0001 mm
Pitch axis*	0.0001 mm
Arbor front/back axis*	0.001°
R/L3D table axis*	0.0001 mm
Upper 3D slide axis*	0.001 mm
Tool changer axis*	0.001°
R-servo axis*	0.001°
Solenoid valves	4 pcs (Max 8 pcs)
Max air pressure	0.5 MPa
Power source	3-phase, AC 200V, 15A
Net weight	860 kg
Control device	Windows
Software	MNO2
Display	15.6" Full HD touch screen
External memory	USB Thumb drive
Temperature	5 ~ 40°C

\* Resolution: Program input unit, which does not represent accuracy.



Before using those products, please read the operator's manual carefully and follow all applicable instructions.

- Use of this product requires safeguard measures to suit your work.
- Specifications, appearance, and equipment are subject to change without notice for improvement and other purposes.
- Photos may include options.
- The specifications described in this catalogue are for the Japanese market. Please ask your sales person for details.

© AMADA PRESS SYSTEM CO., LTD. All Rights Reserved.

**AMADA PRESS SYSTEM CO., LTD.**

1-17-24 Kamiaoki Nishi, Kawaguchi,  
Saitama, 333-0845 Japan  
TEL: +81-48-256-3511 FAX: +81-48-256-3595



May 2025 EN